

11/20/00



PARKHURST & WENDEL, L.L.P.  
1421 Prince Street, Suite 210  
Alexandria, Virginia 22314-2805  
Telephone: (703) 739-0220

Attorney Docket No.: PADE

Date: November 20, 2000

COMMISSIONER FOR PATENTS  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. §1.53(b) is the patent application of

Inventor(s): Teruyuki UCHIHARA and Haruo TAGAWA

For: A METHOD OF RECORDING VIDEO IMAGE AND  
A VIDEO IMAGE RECORDING APPARATUS

Enclosed are:

- [X] Six (6) sheets of informal drawings, Figures 1A-6.
- [X] An Assignment of the invention to MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.
- [ ] Certified copy of Japanese application No. 11-329797 filed November 19, 1999.
- [X] A Declaration and Power of Attorney.
- [ ] A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27.
- [ ] A Preliminary Amendment is enclosed.
- [X] An Information Disclosure Statement.
- [ ] The Verified English-Language Translation, executed Declaration and Assignment and full filing fees will follow in due course.

PLEASE ACCEPT THIS AS  
AUTHORIZATION TO DEBIT  
OR CREDIT FEES TO  
DEP. ACCT. 16-0331  
PARKHURST & WENDEL

	Number Filed	Number Extra	Rate	Basic Fee	\$710.00
Total					
Claims	11 - 20 =	-	x \$ 18.00=	\$ -	
Independent					
Claims	2 - 3 =	-	x \$ 80.00=	\$ -	
Multiple Dependent Claim(s)					
(if applicable)			+ \$ 270.00=	\$	
Total					710.00
Reduction by 1/2 for filing Small Entity				-	
Assignment recordation fee			\$ 40.00=	\$ 40.00	
TOTAL FILING FEE				\$750.00	

- [X] Our Check No. 13364 in the amount of the total filing fee is enclosed. However, if the check is missing or insufficient, the Commissioner is authorized to charge any additional fees which may be required, or credit any overpayment, to our Deposit Account No. 16-0331. Two duplicate copies of this sheet are enclosed.
- [X] The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to our Deposit Account No. 16-0331: any patent application processing fees under 37 CFR 1.17; and any filing fees under 37 CFR 1.16 for presentation of extra claims.

Respectfully submitted,

PARKHURST & WENDEL, L.L.P.



Roger W. Parkhurst  
Registration No. 25,177

RWP/jck  
(rev. 10/00)

## TITLE OF THE INVENTION

A METHOD OF RECORDING VIDEO IMAGE AND  
A VIDEO IMAGE RECORDING APPARATUS

## 5 BACKGROUND OF THE INVENTION

## 1. Field of the Invention

This invention relates to a method of recording video image and a video image recording apparatus and particularly to a method and a recording apparatus for recording video image  
10 from a surveillance video camera system.

## 2. Description of the Prior Art

A video image recording apparatus for recording video image (video image) from a surveillance video camera is known. Japanese patent application provisional publication No. 9-135458  
15 discloses a surveillance video image recording apparatus. In this apparatus, when motion is detected in the video image, the video image is thinned and stored in the memory. At the same time, after a first interval, the video image in the memory is successively read up to a predetermined interval to supply the  
20 video image and then, the video image is switched to the presently shot video image to remove time lag.

## SUMMARY OF THE INVENTION

The aim of the present invention is to provide a superior method of recording video image and a superior video image  
25 recording apparatus.

According to the present invention, a first aspect of the

present invention is a method of recording video image comprising the steps of: successively receiving video image from a surveillance camera system; recording said video image; and thinning said recorded video image in accordance with passage  
5 of time of each of said recorded video image to output said thinned video image and said recorded video image.

Preferably, said step of thinning comprises the step of: thinning frames of said recorded video image for each recording unit, wherein said step of thinning frames is further thinned at  
10 a later recording unit.

Preferably, said step of recording comprises the step of: recurrently distributing and recording said video image of each recording unit of said video image to each of a plurality of recording areas each said recording unit, said video image in one  
15 of a plurality of said recording areas (means) being thinned while said one of a plurality of said recording areas is not used for recording said video image. In this case, step of recording said thinned video image with time relation with said video image recorded while said one of a plurality of said recording  
20 areas is used for recording said video image may be further provided.

Preferably, the method further comprises the steps of: connecting said video image to thinned video image in each of recording areas in accordance with passage of time of said video  
25 image and thinned video image.

Preferably, the method further comprises the steps of:

generating time data; attaching said time data to each frame of said video image to be recorded with said video image.

According to the present invention, a second aspect of the present invention is a video image recording apparatus  
5 comprising: a plurality of recording means for recording video image; switching means for switching said recording means to recurrently record said video image in each of said recording means each recording unit; and thinning means for thinning said video image in one of said recording means while said one of  
10 said recording means is not used for recording said video image.

Preferably, the video image recording apparatus, further comprises: recording means for recording said thinned video image with time relation with said video image recorded while said one of a plurality of said recording means is used for  
15 recording said video image. In this case, connecting means for connecting said video image and thinned video image in each of recording areas in accordance with passage of time of said video image and thinned video image to output said connected video image may be further provided. Moreover, reproducing means  
20 for reproducing said connected video image may be further provided.

Preferably, the video image recording apparatus further comprises: generating means for generating time data; and data attaching means for attaching said time data to each frame of  
25 said video image.

## BRIEF DESCRIPTION OF THE DRAWINGS

The object and features of the present invention will become more readily apparent from the following detailed description taken in conjunction with the accompanying

5 drawings in which:

Fig. 1A is a block diagram of a video image recording apparatus according to a first embodiment of the present invention;

Fig. 1B is a time chart of recording operation of the video  
10 image recording apparatus according to the first embodiment;

Fig. 2 depicts a flow chart illustrating the operation of the video image recording apparatus according to the first embodiment;

Fig. 3 is a time chart illustrating the recording and  
15 thinning operations;

Fig. 4 is an illustration of the composed data according to the first embodiment;

Fig. 5 is a block diagram of a video image recording apparatus according to a second embodiment; and

20 Fig. 6 depicts a flow chart of the video image recording process according to the second embodiment.

The same or corresponding elements or parts are designated with like references throughout the drawings.

## DETAILED DESCRIPTION OF THE INVENTION

25 Hereinbelow a video image apparatus and a method of recording video image according to a first embodiment of this

invention will be described.

Fig. 1A is a block diagram of a video image recording apparatus according to the first embodiment of the present invention. Fig. 1B is a time chart of recording operation of the video image recording apparatus. Fig. 2 depicts a flow chart illustrating the operation of the video image recording apparatus according to the first embodiment. Fig. 3 is a time chart illustrating the recording operation.

The video image apparatus according to the first embodiment includes a switching (distributing) circuit 202, a timer 218 for generating time data including date and time data, first and second video image recording apparatus 203 and 205, first and second video image processing circuits 204 and 206. Further, a connection circuit 200 and a reproducing circuit may be provided. The switching circuit 202 receives a video signal (video image) 201 from a surveillance video camera system, alternately or recurrently supplies the video image to the first and second video image recording apparatus 203 and 205 every predetermined recording unit (a predetermined number of frames), and attaches the time data to each frame of the video image. The first and second video image processing circuits 204 and 206 control frames in the video image recording apparatus 203 and 205, respectively.

At first, the switching circuit 202 successively receives the video signal (real time data) 201 from the surveillance camera system (not shown) and supplies the video image and the time

data to the first video image recording apparatus 203 for a predetermined interval (recording unit), for example, the interval H1. The first video image recording apparatus 203 records the video image and the time data for the interval H1.

5 Then, switching circuit 202 switches the connection to the second video image recording apparatus 205. Then, the second video image recording apparatus 205 records the video image of the following interval H2 and the time data for the interval H2.

Again, the switching circuit 202 switches the connection to the  
10 first video image recording apparatus 203 at the end of the interval H2. This operation is repeated. Thus, the switching circuit 202 alternatively or recurrently distributes the video image and the time data to each of the first and second video image recording apparatus 203 and 205 every recording unit.

15 The first video image processing circuit 204 thins the recorded data in the recording apparatus 203, that is, the recorded data on the recording medium in the first video image recording apparatus 203, while the video image is supplied to the second video image recording apparatus 205 and the first  
20 recording apparatus 203 stops (not used for) recording the video image from the switching circuit 202. More specifically, the first video image processing circuit 204 omits a portion of frames of the recorded video image in the first video image recording apparatus 203 at the recording unit at a predetermined rate.

25 The second video image processing circuit 206 thins the recorded data in the first recording apparatus 205, that is, the



recording medium in the second video image recording apparatus 205, while the video image is supplied to the video image recording apparatus 203 and the second video image recording apparatus 205 stops recording the video image from the switching circuit 202. More specifically, the second video image processing circuit 206 omits a portion of frames of the recorded video image in the second video image recording apparatus 205 at the recording unit at the predetermined rate.

In Figs. 2 and 3, the video image recording apparatus receives the successive video signal with the switching circuit 202 in step 211 and sets the predetermined interval of the recording unit, or a predetermined number of frames of the video signal in step 212. In step 213, the video image recording apparatus starts recording and switching operations.

In step 214, the video image is recorded as video image 310 by the first video image recording apparatus 203 for the predetermined interval (H1).

In step 215, the second video image recording apparatus 205 records the video image 312 for the next interval (H2). During this, the first video image processing circuit 204 thins the recorded data in the first video image recording apparatus 203 as thinned video image 311 (H1/n).

In step 216, the first video image recording apparatus 203 records the video image 315 for the next interval (H3). Moreover, a time (connection) relation between the video image 315 recorded in this step and the thinned video image 311 (H1/n)

as relation data 321 is also recorded. During this, the video image 312 recorded in the second video image recording apparatus 205 is thinned by the second video processing circuit 206 ( $H2/n$ ) as thinned data 313.

5 In step 217, the second video image recording apparatus 205 records the video image 317 for the next interval ( $H4$ ) and then, a time relation 323 between the video image recorded in this step and the thinned video image 313 is also recorded ( $H4+H2/n$ ). During this, the video image 315 ( $H$ ) in the first  
10 video image recording apparatus 203 and the former thinned video image 311 are thinned by the first video processing circuit 204 as the thinned video image 316 and 322 ( $H3/n+H1/m$ ).

In step 218, the first video image recording apparatus 203 records the video image 319 for the next interval ( $H5$ ) and then, a  
15 time relation 324 between the video image 319 recorded in this step and the thinned video image 316 and 322 is recorded ( $H3/n+H1/m$ ). During this, the second video image processing circuit 206 thins the video image 317 and the thinned video image 313 thinned in step 217 as thinned data 318 and 322  
20 ( $H4/n+H2/m$ ).

In step 219, if the recording operation has finished, processing ends. If the recording operation is continued, processing returns to step 217 and repeats the operations of the steps 217 and 218.

25 The relation data 321, 323, 324 are recorded at a data area in the last frame in the recoding unit. Moreover, the relation

data 321, 323, 324 may be stored in a table. Further, the relation data includes the time data of the related data or includes connection data of the recorded video image and the former video image to be connected thinned data, that is, the frame number or address data of the present video image and the frame number or address data of the thinned video image to be connected.

The first and second video image processing circuits 204 and 206 thin the video image at first at the rate of  $1/n$  and at the second, the total thinning rate is  $1/m$ . In this operation  $n < m$ , so that the total recording time interval is shortened. For example, the video image is thinned at a rate of  $1/2$ ,  $1/4$ , or  $1/8$  in accordance with the use to provide the thinned data.

The first video image recording apparatus 203 and the second video recording apparatus 205 output the recorded video image and the thinned video image.

Further, the connection circuit 200 may be provided to connect (compose) the video image from the first video image recording apparatus 203 with the video image from the second video image recording apparatus 205 to provide video image stream.

Fig. 4 shows a data stream of the connected video image 331. The connection circuit 200 connects the video image by successively and alternately reads the video image from the first and second video image recording apparatus 203 and 205 with referring the relation data or the time data.

In Fig. 4, the top portion includes the video image 322 from the first video image recording apparatus 203 for the latest recording unit and successively includes the video image 323 recorded by the second video image recording apparatus 205 at a regular frame rate. At the consecutive recording units 334 and 335, the number of frames is reduced to six from eight for example. Further, the next recording units 336 and 337, the number of frames is reduced to four. When the number of frame in each recording unit reaches one, further thinning is stopped to remain the least information. The connected video image is supplied to the reproducing unit 199 to provide reproduced image of which frame rate is gradually reduced in accordance with passage of thymes of the video image.

As mentioned above, the first and second video image recording apparatus 203 and 205 are switched for recording and each of the first and second video image processing circuits 204 and 206 thins (drops) the frames of the video image recorded the just previous predetermined interval H and records the thinned video image. Moreover, the once thinned video image is further thinned during the next recording OFF interval. Thus, the remaining frame rate decreases in accordance with the passage of time. Finally, at the recording unit, that is, the predetermined interval, there is one frame video image is left. Then, the video image recording apparatus stops the thinning operation to such video image to leave the minimum number of frame at the recording unit.

Moreover, alternately reading the video image from the first video image recording apparatus 203 and from the second video image recording apparatus 205 provides connection of the video image of odd frames with the video image of even frames  
5 to provide video image stream of which frame rate is reduced in accordance with passage of time.

In this embodiment, if a hard disc drive unit is used for the first and second video image recording apparatus 203 and 205, the a plurality of (two) recording areas in the only one hard  
10 disc drive unit are used as the medium of the first and second video image recording apparatus 203 and 205. That is, one recording area is used for recording the present video image and the other is used for thinning the video image.

<SECOND EMBODIMENT>

15 Fig. 5 is a block diagram of a video image recording apparatus according to a second embodiment.

The video image recording apparatus according to the second embodiment includes a motion detection circuit 404 for detecting motion in the video signal 401 from a surveillance  
20 video camera system and a recording circuit 405 for recording the frame of the video signal when the motion detection circuit 404 detects motion in the video signal of the frame.

Thus, the frame of the video signal in which motion is detected is recorded by the recording circuit 405. If the fame of  
25 the video image is a still image, i.e., the frame of the video signal 404 of which motion is not detected, the recording circuit 405

does not record the frame of the video signal.

Fig. 6 depicts a flow chart of the video image recording apparatus according to the second embodiment.

In step 61, the video image recording apparatus judges  
5 whether there is variation (motion) between the present frame  
and the previous frame of the video. If there is variation  
(motion), the video image recording apparatus records the video  
image of the present frame in step 62. If there is no variation  
(motion) in step 61, the video image recording apparatus thins  
10 the video image in step 63. More specifically, the video image  
recording apparatus does not record the video image of the  
present frame in step 63. In step 64 if the recording has finished,  
processing ends. If no, processing returns to step 61 to repeat  
the operation of the steps 61, 62, 63, and 64. Thus, the video  
15 image is thinned in accordance with the motion detection.

As mentioned above, in the first embodiment, the video  
image (signal) 201 is successively received from a surveillance  
camera system. The video image is recorded by the first and  
second video image recording apparatus 203 and 205 and thinned  
20 in accordance with passage of time of each of the recorded video  
image by the video image processing circuits 204 and 206.  
Thinning is effected by thinning (omitting) frames of the  
recorded video image for each recording unit. The thinned  
frames are further thinned at the later recording unit. More  
25 specifically, the switching circuit 202 recurrently distributes the  
video image of each recording unit to each of a plurality of

recording areas (video image recording apparatus 203 and 205)  
each the recording unit for recording. The video image in one  
of a plurality of the recording areas is thinned while one of a  
plurality of the recording areas is not used for recording the  
5 video image. The thinned video image is recorded with time  
relation with the video image recorded while one of a plurality  
of the recording areas is used for recording the video image.  
The video image and thinned video image in each of recording  
areas are connected with each other in accordance with passage  
10 of time of the video image and thinned video image to reproduce  
a stream of time passage video image as shown in Fig. 4.  
Moreover, time data is generated and attached to each frame of  
the video image to be recorded with the video image.

In the first embodiment, the first and second video image  
15 recording apparatus 203 and 205 are used. However, a time-  
sharing operation of recording and thinning with one hard disc  
unit and a memory eliminates the use of two recording apparatus.  
That is, a plurality of recording areas in a hard disc unit are used  
as a plurality of video image recording apparatus.

WHAT IS CLAIMED IS:

1. A method of recording video image comprising the steps of:  
    successively receiving video image from a surveillance  
5 camera system;  
    recording said video image; and  
    thinning said recorded video image in accordance with  
    passage of time of each of said recorded video image to output  
    said thinned video image and said recorded video image.  
10
2. A method as claimed in claim 1, wherein said step of  
    thinning comprising the step of:  
    thinning frames of said recorded video image for each  
    recording unit, wherein said step of thinning frames is further  
15 thinned at a later recording unit.
3. A method as claimed in claim 1, wherein said step of  
    recording comprising the step of:  
    recurrently distributing and recording said video image of  
20 each recording unit of said video image to each of a plurality of  
    recording areas each said recording unit, said video image in one  
    of a plurality of said recording areas being thinned while said  
    one of a plurality of said recording areas is not used for  
    recording said video image.  
25
4. A method as claimed in claim 3, further comprising step of:



recording said thinned video image with time relation with said video image recorded while said one of a plurality of said recording areas is used for recording said video image.

- 5 5. A method as claimed in claim 1, further comprising the steps of:

composing said video image and thinned video image in each of recording areas in accordance with passage of time of said video image and thinned video image.

10

6. A method as claimed in claim 1, further comprising the steps of:

generating time data; and

attaching said time data to each frame of said video image

15 to be recorded with said video image.

7. A video image recording apparatus comprising:

a plurality of recording means for recording video image;

switching means for switching said recording means to

20 recurrently record said video image in each of said recording means each recording unit; and

thinning means for thinning said video image in one of said recording means while said one of said recording means is not used for recording said video image.

25

8. A video image recording apparatus as claimed in claim 7,

further comprising:

recording means for recording said thinned video image  
with time relation with said video image recorded while said one  
of a plurality of said recording means is used for recording said  
5 video image.

9. A video image recording apparatus as claimed in claim 8,  
further comprising:

composing means for composing said video image and  
10 thinned video image in each of recording areas in accordance  
with passage of time of said video image and thinned video  
image to output said composed video image.

10. A video image recording apparatus as claimed in claim 9,  
15 further comprising:

reproducing means for reproducing said composed video  
image.

11. A video image recording apparatus as claimed in claim 6,  
20 further comprising:

generating means for generating time data;

data attaching means for attaching said time data to each  
frame of said video image.

TITLE OF THE INVENTION  
A METHOD OF RECORDING VIDEO IMAGE AND  
A VIDEO IMAGE RECORDING APPARATUS

5 ABSTRACT OF THE DISCLOSURE

Video data is successively received from a surveillance camera system. The video image is recorded and thinned in accordance with passage of time of each of the recorded video image. Thinning is effected by thinning frames of the recorded  
10 video image for each recording unit, wherein the thinned frames are further thinned at the later of the recording unit. More specifically, a switching circuit recurrently distributes the video image of each recording unit to each of a plurality of recording areas each the recording unit for recording. The video image in  
15 one of a plurality of the recording areas is thinned while one of a plurality of the recording areas is not used for recording the video image. The thinned video image is recorded with time relation with the video image recorded while one of a plurality of the recording areas is used for recording the video image.  
20 The video image and thinned video image in each of recording areas are composed (connected) with each other in accordance with passage of time of the video image and thinned video image to reproduce a stream of time passage video image. Moreover, time data is generated and attached to each frame of the video  
25 image to be recorded with the video image.

FIG. 1A

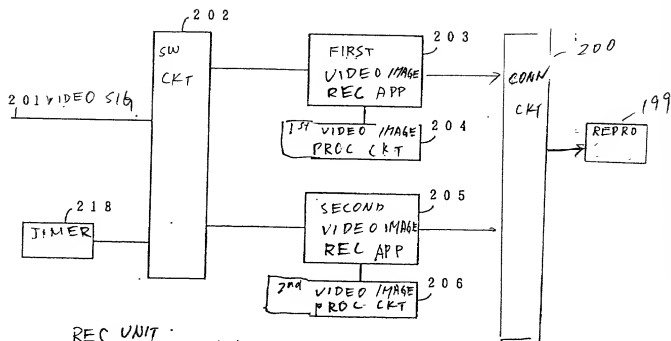
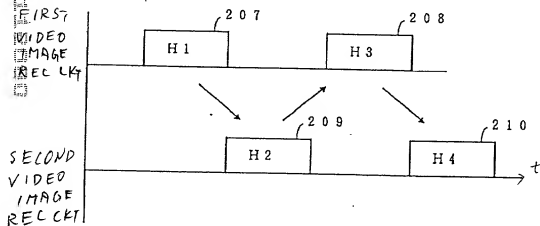
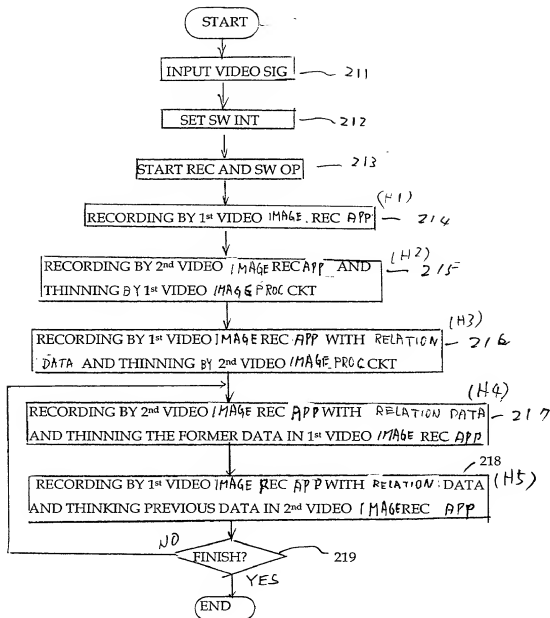
REC UNIT  
FIG. 1B

FIG. 2



F 1 G. 3

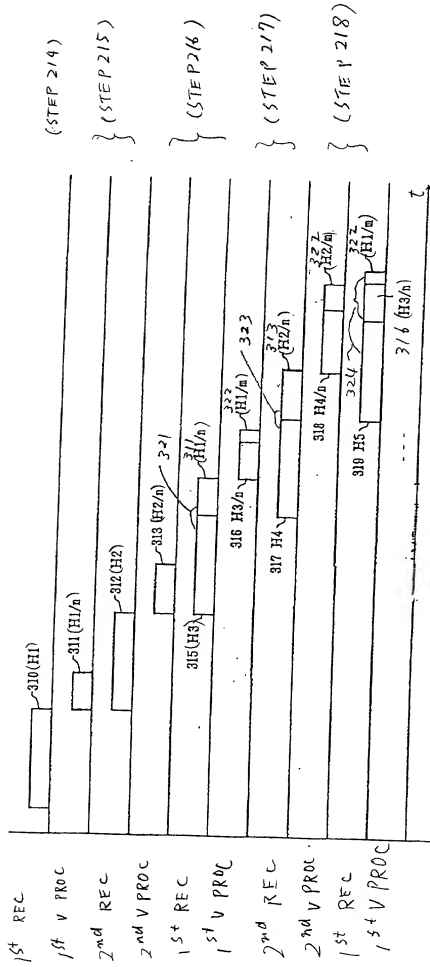




FIG. 5

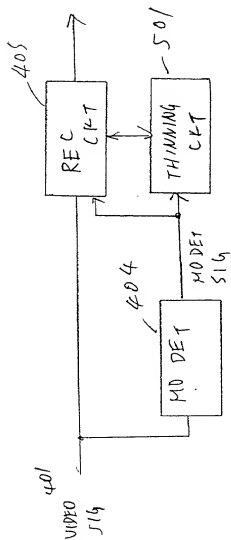
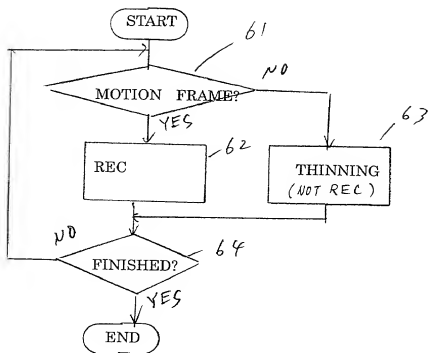




FIG. 6



P24062-01  
US-00051-TM

# APPLICATION FOR UNITED STATES PATENT

## Declaration and Power of Attorney

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; that

I verily believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

A METHOD OF RECORDING VIDEO IMAGE AND A VIDEO IMAGE RECORDING APPARATUS

described and claimed in the specification:

Check one

\*a. ☒ attached hereto.

b. ☐ filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_ and amended on \_\_\_\_\_;  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified application, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information of which I am aware which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a). Under Title 35 U.S. Code §119, the priority benefits of the following foreign application(s) filed within one year prior to this application are hereby claimed:

Japanese Patent Application No. 11-329797 filed November 19, 1999

The following applications for patent or inventor's certificate on this invention were filed in countries foreign to the United States of American either (a) more than one year prior to this application, or (b) before the filing date of the above-named foreign priority application(s):

2 If there are no corresponding applications,  
insert "NONE".

I hereby appoint the following as my attorneys of record with full power of substitution and revocation to prosecute this application and to transact all business in the Patent Office:

Roger W. Parkhurst, Reg. No. 25,177; Charles A. Wendel, Reg. No. 24,453; and/or Lawrence D. Eisen, Reg. No. 41,009

**ALL CORRESPONDENCE IN CONNECTION WITH THIS APPLICATION SHOULD BE SENT TO  
PARKHURST & WENDEL, L.L.P., 1421 Prince Street, Suite 210, Alexandria, Virginia 22314-2805 Telephone:  
(703) 739-0220.**

I hereby declare that I have reviewed and understand the contents of this Declaration, and that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

3 Typewritten Full Name of  
Sole or First Inventor

<u>Teruyuki</u>	<u>Uchihara</u>
Given Name	Middle Initial      Family Name

\*4 Inventor's Signature

Teruyuki Uchihara

5 Date of Signature

<u>November</u>	<u>13,</u>	<u>2000</u>
Month	Day	Year

6 Residence

<u>Yokohama</u>	<u>Japan</u>
City	State or Province      Country

7 Citizenship

<u>Japanese</u>
-----------------

8

Post Office Address

(Insert complete mailing

address, including country)

2028-133, Shin Yoshida-cho, Kohoku-ku, Yokohama 223-0056 Japan

\*This form may be executed only when attached to the specification (including claims) at the end thereof if Box a. is checked.

\*\*Note to the Inventor. Please sign name on line 4 exactly as it appears in line 3 and insert the actual date of signing on line 5.

**IF THERE IS MORE THAN ONE INVENTOR USE PAGE 2 AND PLACE AN "X" HERE [X]**

**PAGE 2 OF U.S.A. DECLARATION FORM**  
**(Discard this page in a sole inventor application)**

3 Typewritten Full Name of  
Second Joint Inventor (if any)

<u>Haruo</u>	<u>Tagawa</u>
Given Name	Family Name

\*4 Inventor's Signature

ESP Haruo Tagawa

5 Date of Signature

ESP November 13, 2000  
Month Day Year

6 Residence

<u>Tokyo</u>	<u>Japan</u>
City	Country

7 Citizenship

8 Post Office Address  
(Insert complete mailing  
address, including country)

21-7, Inaridai, Itabashi-ku, Tokyo 173-0002 Japan

3 Typewritten Full Name of  
Third Joint Inventor (if any)

Given Name	Middle Initial	Family Name
------------	----------------	-------------

\*4 Inventor's Signature

ESP \_\_\_\_\_

5 Date of Signature

ESP \_\_\_\_\_  
Month Day Year

6 Residence

City	State or Province	Country
------	-------------------	---------

7 Citizenship

8 Post Office Address  
(Insert complete mailing  
address, including country)

\_\_\_\_\_

3 Typewritten Full Name of  
Fourth Joint Inventor (if any)

Given Name	Middle Initial	Family Name
------------	----------------	-------------

\*4 Inventor's Signature

ESP \_\_\_\_\_

5 Date of Signature

ESP \_\_\_\_\_  
Month Day Year

6 Residence

City	State or Province	Country
------	-------------------	---------

7 Citizenship

8 Post Office Address  
(Insert complete mailing  
address, including country)

\_\_\_\_\_

3 Typewritten Full Name of  
Fifth Joint Inventor (if any)

Given Name	Middle Initial	Family Name
------------	----------------	-------------

\*4 Inventor's Signature

ESP \_\_\_\_\_

5 Date of Signature

ESP \_\_\_\_\_  
Month Day Year

6 Residence

City	State or Province	Country
------	-------------------	---------

7 Citizenship

8 Post Office Address  
(Insert complete mailing  
address, including country)

\_\_\_\_\_

\*Note to Inventors: Please

sign name on line 4 exactly as it appears in line 3 and insert the actual date of signing on line 5.

\*\*This form may be executed only when attached to the first page of the Declaration and Power of Attorney form and the specification (including claims) of the application to which it pertains.